

# Thermostat

## Instruction

# ShinePhone

### Download



ShinePhone

Use the QR code on the mobile phone to scan the manual to download the "ShinePhone" APP; (You can also search for "ShinePhone" in the APP store to download the app)

### Setting

Thermostat configuration  
Press and hold the "△" and "▽" buttons to enter the "Configuration Mode".




WIFI indicator


Configuration mode

The indicator flashes about 2-3 times/second.

Power on the device

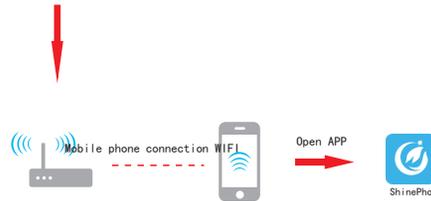


### Register/login

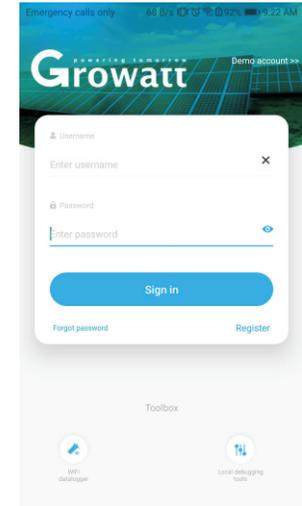

When you log in to the app for the first time, the "Login/Registration" interface will appear. If you already have the account of "ShinePhone" APP, you can directly select "Login"; if there is no account, select "Register"; follow the prompts to complete the operation.

### Configuration

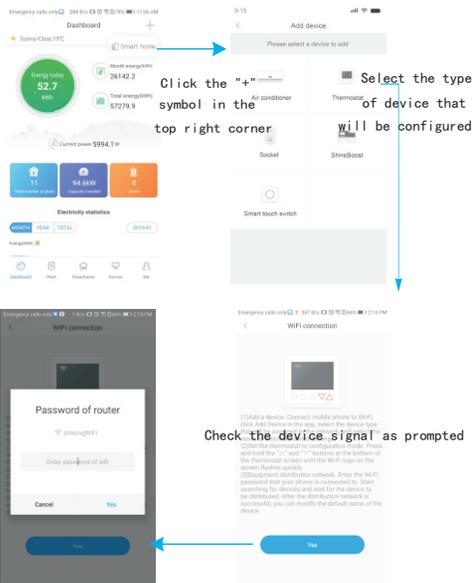


Click the "+" symbol in the top right corner of device that will be configured

Select the type of device that will be configured

Check the device signal as prompted

Enter the password for the WiFi connected to your phone.


### Configuration

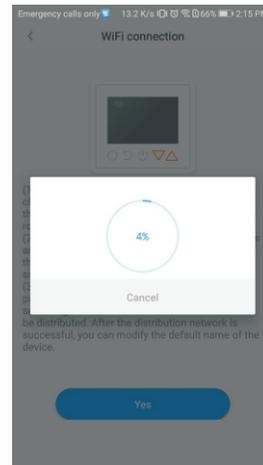

be distributed. After the distribution network is successful, you can modify the default name of the device.

Waiting for the distribution network to succeed

### Operation

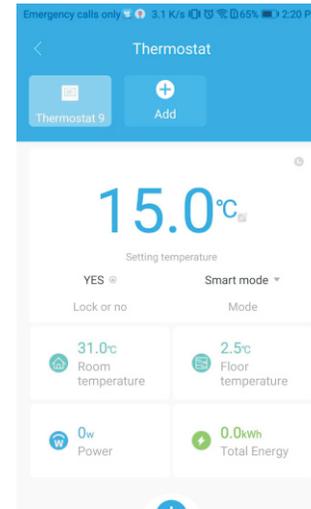

Device "Settings" button

ON

Device "switch" button

### Precautions

- There is high pressure inside the equipment. If you need maintenance, please find a professional.
- Do not exceed the rated load of the electrical equipment
- If the WiFi signal light is on, it indicates that the device is disconnected from the network or there are other abnormalities;
- If the router name linked to the device is Chinese, the distribution network may fail.
- This product only supports 2.4G network and does not support wireless networks in other frequency bands;
- The interface of different specifications is different. Please refer to the actual information of the product.